

# Automatic Dry Air Leak Testing

## JWF Leak Test Panels Series 200



Advanced Leak Testing Technology:

## JWF Leak Test Panels Series 200

Proven Leak and Flow Test Systems  
for High-Volume Production  
and Quality Assurance

### JWF Leak Test Panel MPS 200 Relative Pressure Measurement


- Test methods:
  - Pressure Decay or Rise
  - Over-pressure (burst) or Vacuum
- Resolution: from 1 Pa (0.00015 psi)

### JWF Leak Test Panel MPS 250 Differential Pressure Measurement

- Test methods:
  - Pressure Decay or Rise
  - Over-pressure (burst) or Vacuum
- Resolution: from 0.1 Pa (0.000015 psi)

### JWF Leak Test Panel MFL 200 Mass Flow Measurement

- Using the Zero Resistance JWF Mass Flow Sensor
- The measurement signal is insensitive of atmospheric pressure and temperature
- The measurement signal directly corresponds to the leaking air flow
- Well suited for large volume components
- Resolution: from 0.01 std. cm<sup>3</sup>/min

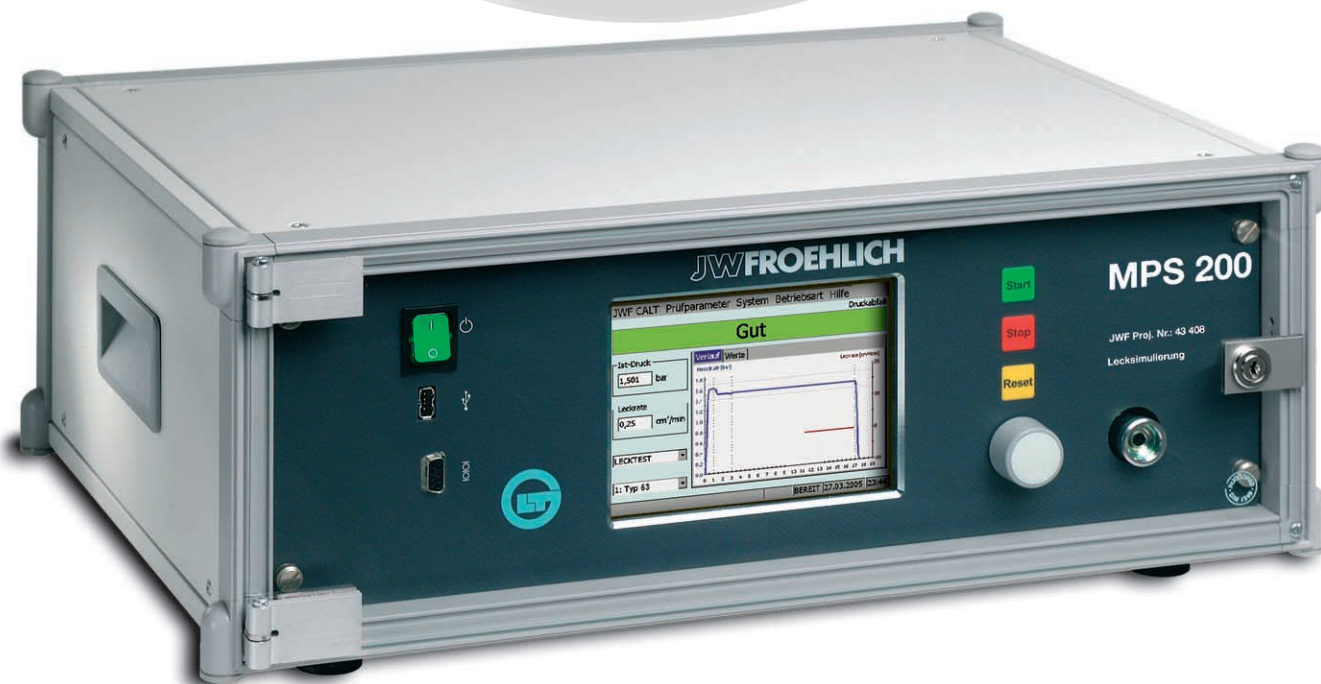



## Technical Data

- Windows user interface
- 6,5 inch Colour Display
- Front Panel Navigation Dial for quick and easy configuration
- On-line display of the test sequence
- Instruction Manual and Help Index available on Front Display
- Data Storage Module for
  - 1,000 test results
  - 500 measurement signal curves
- Statistical Analysis of the test results
  - mean value, standard deviation, trend analysis
  - quality control chart
  - normal curve of distribution
- Number of test programmes: 32, fully programmable
- Communication ports
  - Front panel
    - 1 x RS-232
    - 1 x USB
  - Rear panel
    - Digital Inputs, 24 Vdc (10 max.)
    - Digital Outputs, max. Dry Contacts (6 max.)
    - 1 x Profibus (optional)
    - 1 x Ethernet (optional)
- On-line connection to a remote JWF Leak Calibrator. The amplification factor of the leak test panel is automatically adjusted according to the leak rate value of the Leak Calibrator.
- Programmable Test Pressure
- Automatic self test
- Lockable Front Plexiglas Door
- Steel cabinet 19" - 3 HE, protection class IP 54
- Dimensions: 540 x 220 x 390 mm
- Weight: approx. 16 kg
- Electrical supply: 24 VDC, 5 A
- Pneumactical supply: Air
  - 7.5 to 15 psi above Fill Pressure setting
  - Oil and Water free in accordance to DIN ISO 8573-1 class 3


## Optional

- Air Filtration Unit incl. dirt and water trap, pressure regulator and pressure gauge (delivered as loose item)
- Power Supply Unit for electrical connection to 110/230 V, 50/60 cycles (delivered as loose item)
- Temperature Compensation
- Selectable Languages
- Tele-Service (Remote Communication)

## Accessory

- Leak Calibrator LK 20



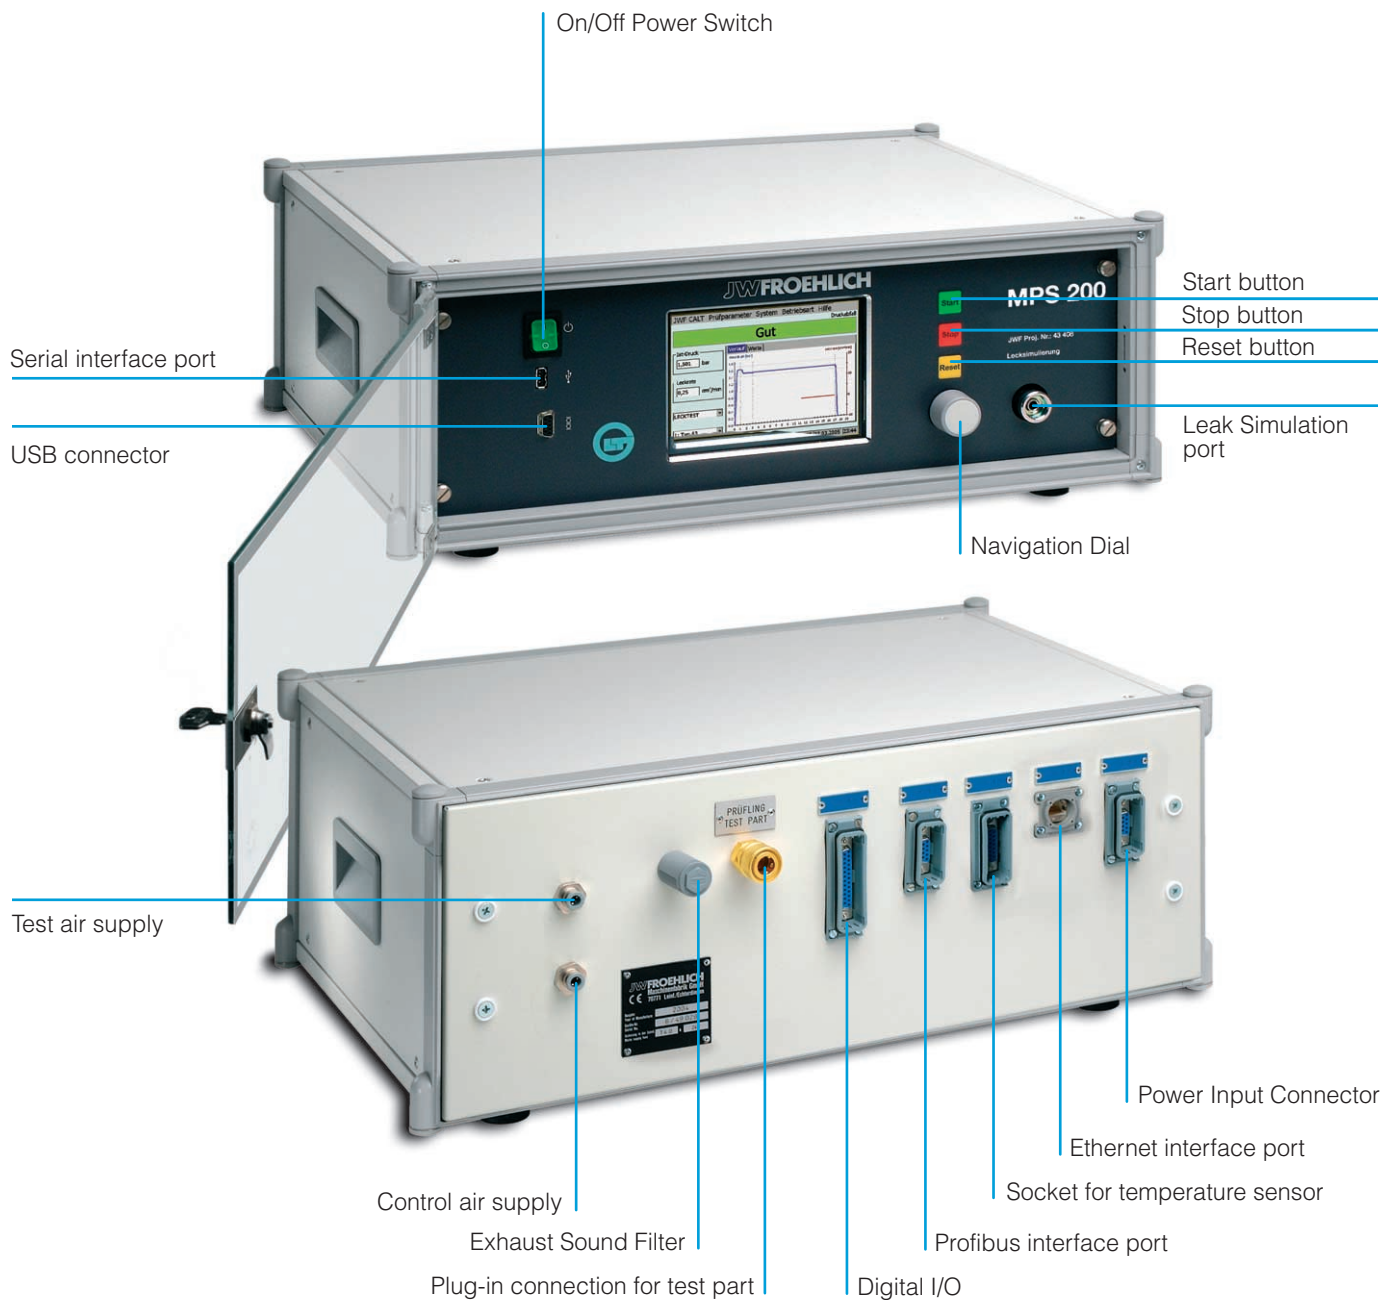

**JW Froehlich Maschinenfabrik GmbH**  
 Kohlhammerstrasse 18-24  
 D-70771 Leinfelden-Echterdingen  
 Tel. (0711) 7 97 66-0  
 Fax (0711) 7 97 66-799  
 www.jwf.com

**JW Froehlich Maschinenfabrik GmbH**  
 Fabrikstrasse 34  
 D-73207 Plochingen  
 Tel. (07153) 70 12-0  
 Fax (07153) 70 12-19  
 www.jwf.com

**JW Froehlich (UK) Ltd.**  
 Sable Way, Southfields Business Park  
 Laindon Essex SS15 6TU  
 Tel. (01268) 469-000  
 Fax (01268) 469-001  
 www.jwf.co.uk

**JW Froehlich Dalian**  
 Sanhe Mansion, Room 1406  
 Xiangzhou Road 249, Shahekou District  
 116033 Dalian, P.R. CHINA  
 Tel. 0086 411 8688 2722  
 Fax 0086 411 8688 2733  
 E-Mail: chijiaxin@china.com

**JWF Shanghai Office**  
 Laiting South Road 558  
 Jiang Nan Wen Hua Yuan 235  
 201615 Shanghai, P.R. China  
 Tel. 0086 21 6762 0355  
 Fax 0086 21 6762 0373  
 E-Mail: duanzg@public1.sta.net.cn